




BVCert. 6010761



Range :	COSY
Function :	Ageing (I-temperature)
Reference :	COSYPIT
Equipment :	4 sliding shelves
Capacity* :	39 Bottles*

Configuration

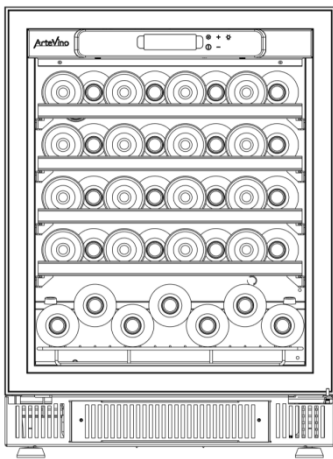

Bottles capacity with 4 sliding shelves : **39 Bottles***

* Traditional Bordeaux bottles



Homogenous constant and reliable temperature thanks to the wine cabinet insulation, the controller and the aluminium walls.



Humidity rate between 65% and 80% ensuring by our product design, the cooling and venting system,



The natural venting system of our wine cabinets ensures constant air renewal within the wine cabinet.



Ideal protection against UV rays thanks to our glass door with double pan reinforced with gaz argon to filter up to 97% of the UV rays.



No vibration thanks to the slow-cycles compressor fixed on silent blocs + evaporator flooded in the high density polyurethane foam.

General Features

Dimensions H x W x D (mm)	816/832 x 594 x 549	Weight cabinet empty (kg)	45
Dimensions in pack (mm)	1000 x 620 x 620	Weight equipped cabinet (kg)	52
Colors	Black	Weight in pack (kg)	60
Door	Glass door with black frame	Useful volume (L)	116

Equipment & Accessories

Equipment

- Glass door black frame, stainless steel handle
- Reversible door
- One humidity cassette
- Interior lighting with 2 white LEDs integrated under the control panel ; two lighting options: On/ Off
- 4 adjustable feet and 4 hexagonal pillars to elevate the wine cabinet
- 2 hinges: one for the stand alone installation and one for the built-in installation
- Labels for the bottles identification

Accessories

Universal shelves: ACHUI

Weight : 1,8 kg

Bottles capacity per level : 8*

Material : Solid beech wood.

Modular system : you can choose the shelf configuration :



Sliding shelf



Presentation shelf



Storage shelf

The label holder allows you to identify your bottle quickly and easily



Suitable to store all types of bottles



Technical features

Control panel

- Electronic regulation from 9°C to 15°C; one identical temperature inside the wine cabinet
- Inner electronic display, LED screen with white display with touch buttons
- Hygrometry rate of the wine cabinet display possible
- Visual alarm : sensor fault, temperature fault and humidity default
- Temperature display

Performances

Cold production :	static cooling
Hot production :	Heating element
Winter function:	Automatic
Gaz uses :	R600a
Recommended temperature range :	From 0°C to 30 °C
Climate class :	SN
Inner material:	Aluminium
Insulation type:	PU foam
Acoustic emissions (db(A)):	41
Consumption Aec(kWh/ An)**:	132
Energy efficiency rating :	A
Consumption Aec(kWh/ An)***:	172

* Traditional Bordeaux bottles

** Calculation based on the result obtained over 24 hrs in standard conditions (25°C / 77°F) Alimentation 230V 50Hz.

*** Comply with DEPARTMENT OF ENERGY – 10 CFR Part 430 – Energy Conservation Program: Energy Conservation Standards for Miscellaneous Refrigeration Products Alimentation 115V 60Hz